

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 e-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex CM 20 2TT, UK
 Phone: +44 1279 635533
 Fax: +44 1279 635262
 e-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 e-mail: info@jumo.us
 Internet: www.jumo.us



JUMO safetyM TB/TW Temperature limiter, temperature monitor according DIN EN 14 597

with LCD for mounting on 35mm DIN rails


Brief description

The JUMO safetyM TB/TW is a freely programmable temperature limiting device. The measurement input is freely configurable for RTD temperature probes and thermocouples, as well as for current and voltage signals. TB/TWs monitor thermal processes in systems for a set limit value. If this is exceeded, the built-in relay (with internal fuse) switches the system to a safe operational state and the LED K1 switches from green to red. When the system returns to the o.k. region, the reset button (on the TB) has to be released manually using an appropriate tool. The TW, on the other hand, is reset automatically without any external action. The binary output 24V/20mA produces a pre-alarm signal at an adjustable temperature before reaching the limit value, which is additionally indicated via the LED KV. TB/TWs are mounted on DIN rails and wired up by means of screw terminals with 2.5mm² max. conductor cross-section. A PC setup program is available as an accessory, which can be used to set and store probe type, range, output action and inhibits.



Typ 701160/ ...

Block diagram

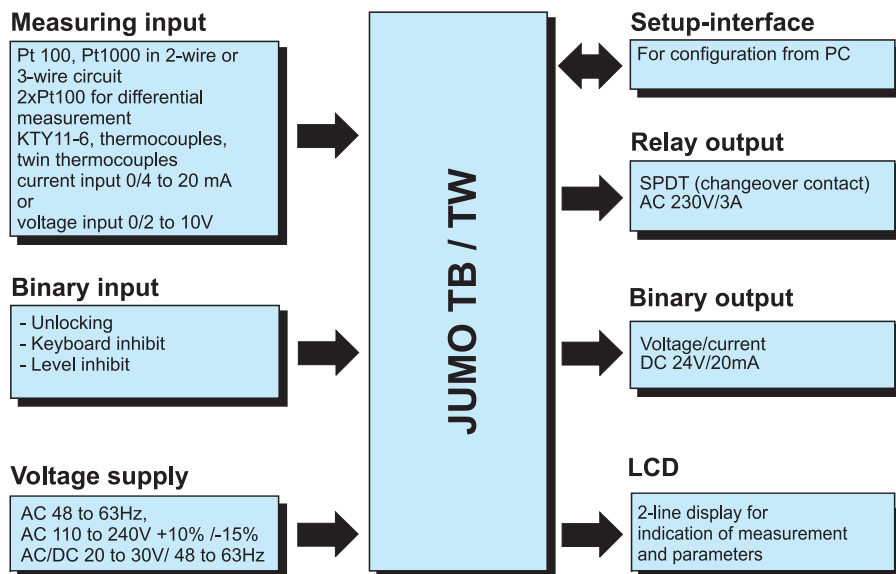

Special features

- Setup program for configuration and archive data backup
- Clear, easy-to-read alphanumeric display
- Digital input filter with adjustable filter time constant
- adjustable as absolute value or relative to limit value
- Wide supply voltage range 110 – 240V AC +10% /-15%
- Configurable as TB or TW
- 17 linearizations can be set
- Internal and external locking options
- input 2 x Pt100 for differential measurement

Approval/approval marks (see technical data)



Technical data

Analog inputs

RTD temperature probe

| Designation | Measuring range | Accuracy ¹ |
|------------------|---|-----------------------|
| Pt 100 EN 60751 | -200 ... +850 °C | 0.1% |
| KTY11-6 PTC | -50 ... 150 °C | 1% |
| Pt 1000 DIN | -200 ... +850 °C | 0.1% |
| connection types | 2-wire, 3-wire circuits | |
| Sampling | 210ms | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 to 100secs | |
| Special features | 2x Pt100 for differential measurement, display can also be programmed in °F | |

thermocouples

| Designation | Measuring range | Accuracy ¹ |
|---------------------------|--|-----------------------|
| Fe-CuNi "L" DIN 43710 | -200 to +900 °C | 0.4% |
| Fe-CuNi "J" EN 60584 | -200 to +1200 °C | 0.4% |
| Cu-CuNi "U" DIN 43710 | -200 to +600 °C | 0.4% |
| Cu-CuNi "T" EN 60584 | -200 to +400 °C | 0.4% |
| NiCr-Ni "K" EN 60584 | -200 to +1372 °C | 0.4% |
| NiCrSi-NiSi "N" EN 60584 | -100 to +1300 °C | 0.4% |
| Pt10Rh-Pt "S" EN 60584 | 0 to +1768 °C | 0.4% |
| Pt13Rh-Pt "R" EN 60584 | 0 to +1768 °C | 0.4% |
| Pt30Rh-Pt6Rh "B" EN 60584 | 300 to 1820 °C | 0.4% |
| W3Re-W25Re "D" | 0 ... 2495 °C | 0.4% |
| Cold junction | Pt 100, internal | |
| Cold junction accuracy | ± 1K | |
| Sampling rate | 210 ms | |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 to 100secs | |
| Special features | also programmable in °F | |

1. Accuracy refers to the maximum extent of the measuring range.
If the measuring range is smaller, the linearisation accuracy is reduced .

DC voltage, DC current

| Measuring range | Accuracy |
|--|--|
| 0 to 20mA, voltage drop < 2 V 4 to 20mA, voltage drop < 2 V | 0.2% |
| 0 to 10V, input resistance > 100 kΩ 2 to 10V, input resistance > 100 kW | 0.1% |
| Scaling | freely programmable within the limits |
| Sampling rate | 210 ms |
| Input filter | 2nd order digital filter; filter constant adjustable from 0 to 100secs |

Measuring circuit monitoring

| | RTD temperature probe and KTY11-6 | Twin thermocouples | Thermocouples | Current 0 to 20 mA, 4 to 20mA Voltage 0 to 10 V, 2 to 10 V |
|--------------------------|---|--------------------|------------------------|--|
| Overrange and underrange | is detected LEDs K1 and KV light up; "1999" flashes in the display | | | |
| Probe and lead break | is detected LEDs K1 and KV light up; "1999" flashes in the display; relay K1 is active. | | | is detected at 4 to 20mA and 2 to 10V |
| Probe short circuit | is detected LEDs K1 and KV light up; "1999" flashes in the display Relay K1 is inactive | | is not detected | LEDs K1 and KV light up; "1999" flashes in the display Relay K1 is inactive |

Binary input

| connection | Function |
|--------------------|---|
| 1 floating contact | Configurable unlocking, keyboard inhibit, level inhibit |

Binary outputs

| | |
|---------------|---|
| Relay | 100.000 operations at a contact rating of 3.15A/250V, 50Hz resistive load |
| | contact suppression safety fuse 3.15AT, installed in the pole contact arm within the device |
| Binary output | 24 V DC / 20mA logic signal, short-circuit proof |


Voltage supply

| | |
|-------------------|---|
| voltage supply | 20 - 30V AC/DC, 48 ...63 Hz 110V/240V AC, +10% /-15% |
| Power consumption | 5 VA |


Approval/Marks

| approval marks | Inspection authority | Certificate/Inspection numbers | inspection basics | valid for |
|----------------|---------------------------|--------------------------------|-------------------|-------------------------|
| DIN | DIN CERTCO | TW/TB 1206 08 | DIN EN 14597 | all instrument versions |
| c UL us | Underwriters Laboratories | 20091123-E325456 | UL 60730-2-9 | all instrument versions |

Switching action at limit value

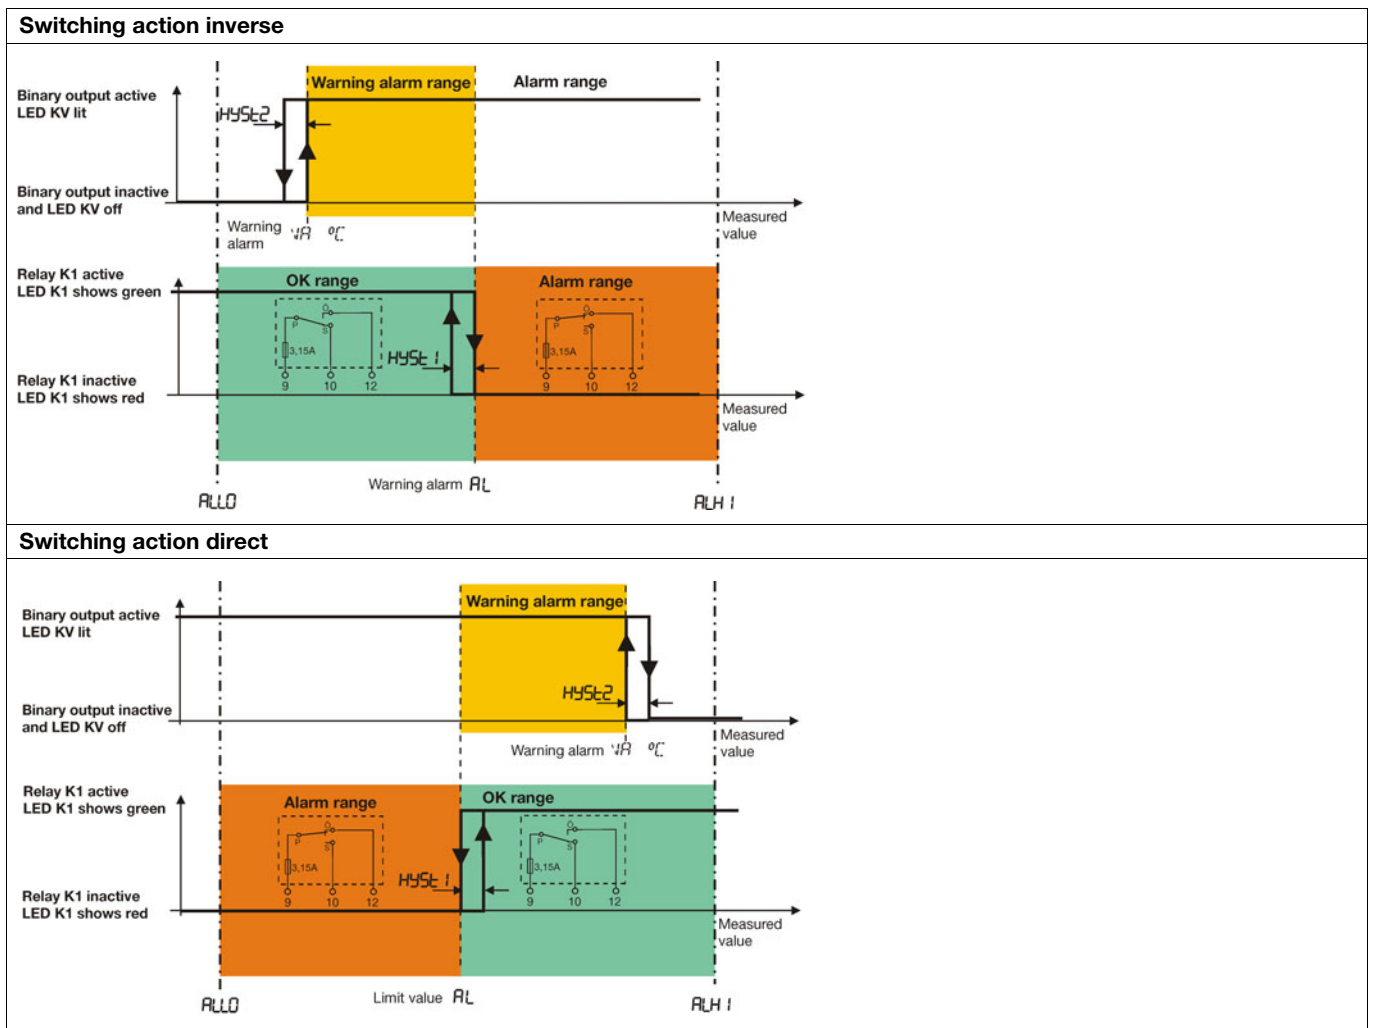

Switching action at differential measurement

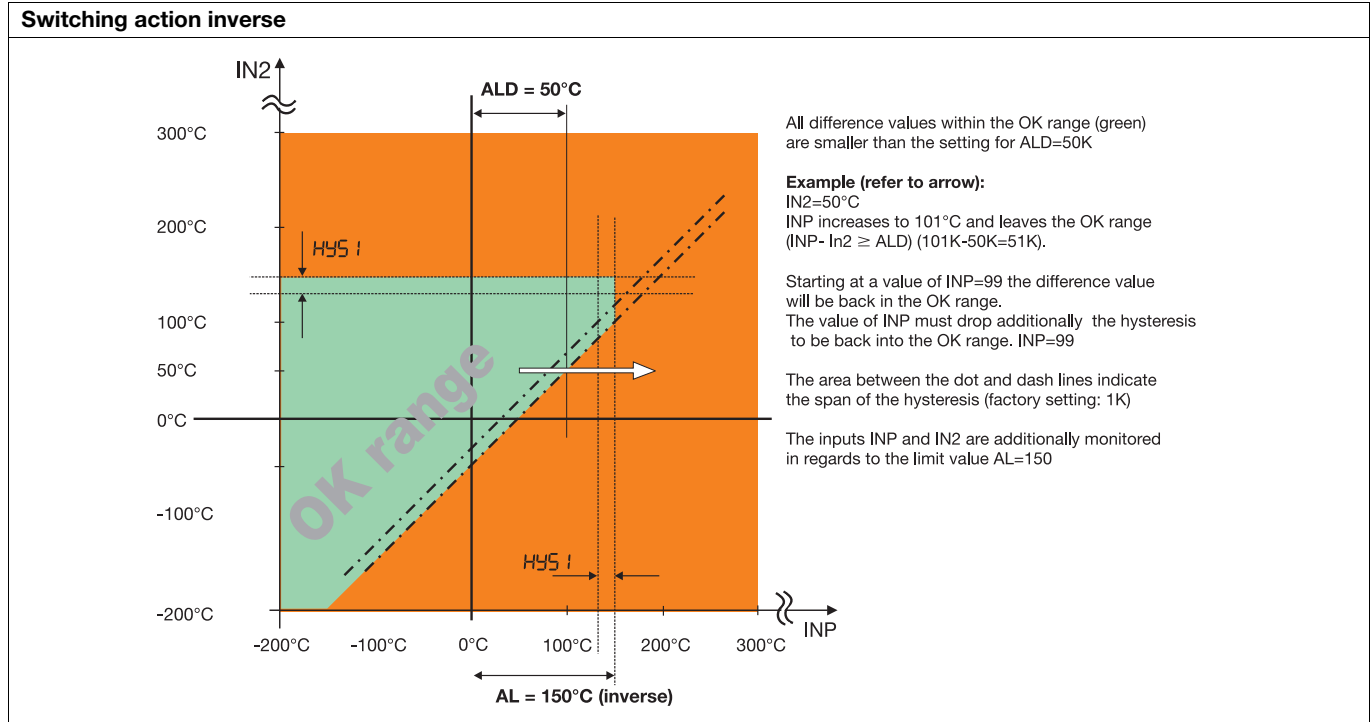

Test voltages to EN 60730, Part 1

| | |
|--|------------|
| Between input or output and supply | |
| - at 110 - 240 V AC supply +10% /-15% | 3.7kV/50Hz |
| - at 20 - 30V AC/DC supply, 48 - 63 Hz | 3.7kV/50Hz |

Electrical safety

| | Clearances / creep paths |
|--|--|
| Mains to electronic components and probe | ≥ 6 mm / ≥ 8 mm |
| Mains to the relay | ≥ 6 mm / ≥ 8 mm |
| Relay to electronic components and probe | ≥ 6 mm / ≥ 8 mm |
| Electrical safety | according to DIN EN 14597 (DIN EN 60730-2-9) Overvoltage category III, pollution degree 2 |
| Protection type I | with internal separation to SELV current circuits |

Environmental influences

| | |
|---------------------------|--|
| Ambient temperature range | 0 ... +55°C |
| Storage temperature range | -30 ... +70°C |
| Temperature error | ≤ ± 0.005 % / K dev. from 23°C ¹ for resistance thermometers ≤ ± 0.01 % / K dev. from 23°C ¹ for thermocouple, current, voltage |
| Climatic conditions | 85 % rel. humidity, no condensation (3K3 with extended temperature range to EN 60721) |
| EMC | to EN 14597 and standards from the EN 61326 series of standards |
| Interference emission | Class B |
| Interference immunity | Test level for safety, control and regulating instruments (RS) to EN 14597 |


1. All details refer to the full scale value

Housing

| | |
|-------------------|---|
| Material | polyamide (PA 6.6) |
| Screw terminal | 0.2 - 2.5mm ² screw terminal |
| Mounting | on 35mm x 7.5mm DIN rail to EN 60715 |
| mounting position | vertical |
| Weight | approx. 160g |
| Protection type | IP 20 to EN 60529 |

Dimensions

Type 701160/...

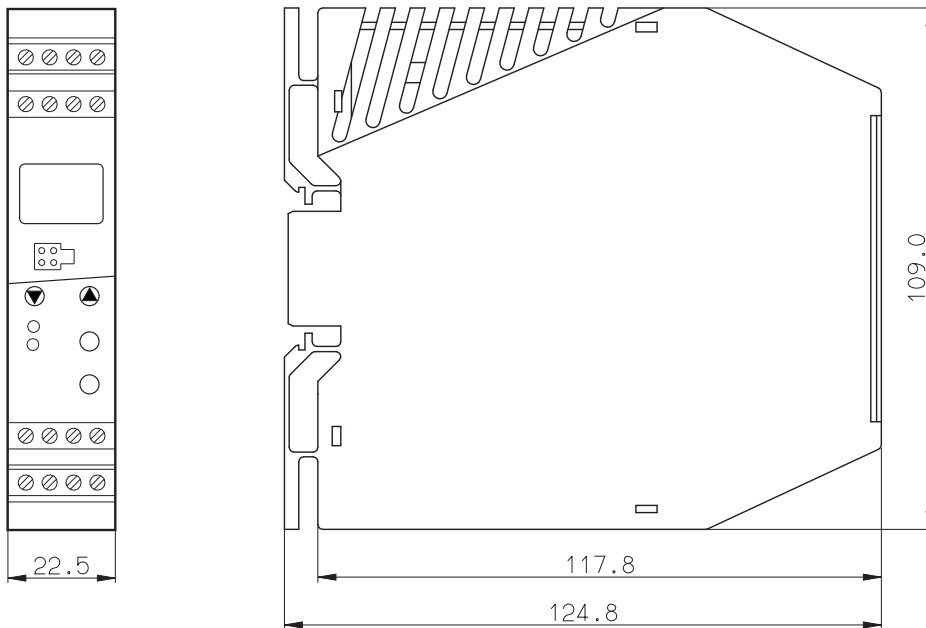

DIN-approved probes for operation in air

Note: Because of the high response accuracy, the use of **thermowells** (pockets) is **not admissible**.

| Actual type designation | Old type designation | Probe type | Temperature range | Nom. length mm | Process connection |
|---|----------------------|-------------------------|-------------------|----------------|-----------------------------------|
| RTD temperature probe Data Sheet 90.2006 | | | | | |
| 902006/65-228-1003-1-15-500-668/000 | - | 1 x Pt100 | -170 ... +700°C | 500 | |
| 902006/65-228-1003-1-15-710-668/000 | - | | | 710 | |
| 902006/65-228-1003-1-15-1000-668/000 | - | | | 1000 | |
| 902006/55-228-1003-1-15-500-254/000 | - | 1 x Pt100 | -170 ... +700°C | 500 | |
| 902006/55-228-1003-1-15-710-254/000 | - | | | 710 | |
| 902006/55-228-1003-1-15-1000-254/000 | - | | | 1000 | |
| 902006/65-228-2003-1-15-500-668/000 | 90.271-F01 | 2 x Pt100 | -170 ... +700°C | 500 | Stop flange, movable |
| 902006/65-228-2003-1-15-710-668/000 | 90.272-F01 | | | 710 | |
| 902006/65-228-2003-1-15-1000-668/000 | 90.273-F01 | | | 1000 | |
| 902006/55-228-2003-1-15-500-254/000 | - | 2 x Pt100 | -170 ... +700°C | 500 | movable G1/2 compression clamp |
| 902006/55-228-2003-1-15-710-254/000 | - | | | 710 | |
| 902006/55-228-2003-1-15-1000-254/000 | - | | | 1000 | |
| Thermocouples Data Sheet 90.1006 | | | | | |
| 901006/65-547-2043-15-500-668/000 | 90.019-F01 | 2 x NiCr-Ni, Type „K“ | -35 ... +800°C | 500 | Stop flange, movable |
| 901006/65-547-2043-15-710-668/000 | 90.020-F01 | | | 710 | |
| 901006/65-547-2043-15-1000-668/000 | 90.021-F01 | | | 1000 | |
| 901006/65-546-2042-15-500-668/000 | 90.019-F11 | 2 x Fe-CuNi, Type „L“ | -35 ... +700°C | 500 | |
| 901006/65-546-2042-15-710-668/000 | 90.020-F11 | | | 710 | |
| 901006/65-546-2042-15-1000-668/000 | 90.021-F11 | | | 1000 | |
| 901006/66-550-2043-6-500-668/000 | 90.023-F01 | 2 x NiCr-Ni, Type „K“ | -35 ... +1000°C | 500 | |
| 901006/66-550-2043-6-355-668/000 | 90.023-F02 | | | 355 | |
| 901006/66-550-2043-6-250-668/000 | 90.023-F03 | | | 250 | |
| 901006/66-880-1044-6-250-668/000 | 90.021 | 1 x PT10Rh-PT, Type „S“ | 0 ... 1300°C | 250 | |
| 901006/66-880-1044-6-355-668/000 | 90.022 | | | 355 | |
| 901006/66-880-1044-6-500-668/000 | 90.023 | | | 500 | |
| 901006/66-880-2044-6-250-668/000 | 90-D-021 | 2 x PT10Rh-PT, Type „S“ | 0 ... 1300°C | 250 | Stop flange, movable |
| 901006/66-880-2044-6-355-668/000 | 90-D-022 | | | 355 | |
| 901006/66-880-2044-6-500-668/000 | 90-D-023 | | | 500 | |

| | | | | | |
|----------------------------------|----------|----------------------------|----------------|-----|--|
| 901006/66-953-1046-6-250-668/000 | 90.027 | 1 x PT30Rh-PT6Rh, Type „B“ | 600 ... 1500°C | 250 | |
| 901006/66-953-1046-6-355-668/000 | 90.028 | | | 355 | |
| 901006/66-953-1046-6-500-668/000 | 90.029 | | | 500 | |
| 901006/66-953-2046-6-250-668/000 | 90-D-027 | 2 x PT30Rh-PT6Rh, Type „B“ | 600 ... 1500°C | 250 | |
| 901006/66-953-2046-6-355-668/000 | 90-D-028 | | | 355 | |
| 901006/66-953-2046-6-500-668/000 | 90-D-029 | | | 500 | |

DIN-approved probes for operation in water and oil

Note: Because of the high response accuracy, the use of **thermowells** (pockets) is **not admissible**.

| Actual type designation | Old type designation | Probe type | Temperature range | Nom. length mm | Process connection |
|---|----------------------|-----------------------|-------------------|----------------|-----------------------------------|
| RTD temperature probe Data Sheet 90.2006 | | | | | |
| 90.2006/10-402-1003-1-9-100-104/000 | | 1 x Pt100 | -40 ... +400°C | 100 | G1/2 screw connection |
| 90.2006/10-402-2003-1-9-100-104/000 | | 2 x Pt100 | | 100 | |
| 902006/54-227-2003-1-15-710-254/000 | 90.272-F02 | 2 x Pt100 | -170 ... 550°C | 65...670 | movable G1/2 compression clamp |
| 902006/54-227-1003-1-15-710-254/000 | 90.272-F03 | 1 x Pt100 | | 65...670 | |
| 902006/10-226-1003-1-9-250-104/000 | 90.239 | 1 x Pt100 | -170 ... 480°C | 250 | G1/2 screw connection |
| 902006/10-226-2003-1-9-250-104/000 | 90-D-239 | 2 x Pt100 | | 250 | |
| Thermocouples Data Sheet 90.1006 | | | | | |
| 901006/54-544-2043-15-710-254/000 | 90.020-F02 | 2 x NiCr-Ni, Type „K“ | -35 ... 550°C | 65...670 | movable G1/2 compression clamp |
| 901006/54-544-1043-15-710-254/000 | 90.020-F03 | 1 x NiCr-Ni, Type „K“ | | 65...670 | |
| 901006/54-544-2042-15-710-254/000 | 90.020-F12 | 2 x FeCuNi, Type „L“ | | 65...670 | |
| 901006/54-544-1042-15-710-254/000 | 90.020-F13 | 1 x FeCuNi, Type „L“ | | 65...670 | |

DIN-approved probes for operation in water and oil

Note: Because of the high response accuracy, the use of **thermowells** (pockets) is **not admissible**.

| Actual type designation | Old type designation | Probe type | Temperature range | Nom. length mm | Process connection |
|---|----------------------|-----------------------|-------------------|----------------|-----------------------------------|
| RTD temperature probe Data Sheet 90.2006 | | | | | |
| 90.2006/10-402-1003-1-9-100-104/000 | | 1 x Pt100 | -40 ... +400°C | 100 | G1/2 screw connection |
| 90.2006/10-402-2003-1-9-100-104/000 | | 2 x Pt100 | | 100 | |
| 902006/54-227-2003-1-15-710-254/000 | 90.272-F02 | 2 x Pt100 | -170 ... 550°C | 65...670 | movable G1/2 compression clamp |
| 902006/54-227-1003-1-15-710-254/000 | 90.272-F03 | 1 x Pt100 | | 65...670 | |
| 902006/10-226-1003-1-9-250-104/000 | 90.239 | 1 x Pt100 | -170 ... 480°C | 250 | G1/2 screw connection |
| 902006/10-226-2003-1-9-250-104/000 | 90-D-239 | 2 x Pt100 | | 250 | |
| Thermocouples Data Sheet 90.1006 | | | | | |
| 901006/54-544-2043-15-710-254/000 | 90.020-F02 | 2 x NiCr-Ni, Type „K“ | -35 ... 550°C | 65...670 | movable G1/2 compression clamp |
| 901006/54-544-1043-15-710-254/000 | 90.020-F03 | 1 x NiCr-Ni, Type „K“ | | 65...670 | |
| 901006/54-544-2042-15-710-254/000 | 90.020-F12 | 2 x FeCuNi, Type „L“ | | 65...670 | |
| 901006/54-544-1042-15-710-254/000 | 90.020-F13 | 1 x FeCuNi, Type „L“ | | 65...670 | |

DIN-approved probes for operation air, water and oil

Note: Because of the high response accuracy, the use of **thermowells** (pockets) is **not admissible**.

| Actual type designation | Old type designation | Probe type | Temperature range | Install. length mm | Process connection |
|---|----------------------|-----------------------|-------------------|--------------------|--------------------|
| RTD temperature probe Data Sheet 90.2006 | | | | | |
| 90.2006/10-390-1003-1-8-250-104/000 | 90.210-F95 | 1 x Pt100 | max. 300°C | 250 | |
| Thermocouples Data Sheet 90.1006 | | | | | |
| 901006/45-551-2043-2-xxxx-11-xxxx | | 2 x NiCr-Ni, Type „K“ | max. 1550°C | 50...2000 | |

Connection diagram

| | | | | |
|--|--|--|-----------------------|--|
| | | | | |
| | Voltage supply as on nameplate | AC L1 External conductor N Neutral conductor | DC L+ L- | |
| | Analog inputs | Thermocouple Twin thermocouple RTD temperature probe or KTY11-6 PTC in 2-wire circuit If an RTD temperature probe in 2-wire circuit with longer cable lengths is connected, the lead resistance must be entered into the setup program and transmitted to the device. Resistance thermometer in 3-wire circuit Resistance thermometers 2 x Pt100 in 2-wire circuit for differential measurement (lead compensation not possible) 0(4) ... 20 mA or 0(2) ... 10 V | | |
| | Binary input | for connection to floating contact | | |
| | Binary output | 24 V DC / 20 mA (short-circuit proof) | | |
| | Relay output | Relay with safety fuse for pole contact | | |

Order details

701160

Basic type

Temperature limiter (TB) / temperature monitor (TW)

Version

- 8 factory setting
- 9 configuration to customer specification

Switching action

- 0151 Inverse temperature monitor
- 0152 Direct temperature monitor
- 0153 Inverse temperature limiter
- 0154 Direct temperature limiter

Measurement input (programmable)

- 001 Pt100 in 3-wire circuit
- 003 Pt100 in 2-wire circuit
- 005 Pt1000 in 2-wire circuit
- 006 Pt1000 in 3-wire circuit
- 024 2 x Pt100 for differential measurement
- 037 W3Re-W25Re "D"
- 039 Cu-CuNi "T"
- 040 Fe-CuNi "J"
- 041 Cu-CuNi "U"
- 042 Fe-CuNi "L"
- 043 NiCr-Ni "K"
- 044 Pt10Rh-Pt "S"
- 045 Pt13Rh-Pt "R"
- 046 Pt30Rh-Pt6Rh "B"
- 048 NiCrSi-NiSi "N"
- 052 0 - 20 mA
- 053 4 - 20 mA
- 063 0 - 10 V
- 071 2 - 10 V
- 601 KTY11-6

Supply

- 23 110 - 240 V AC +10% /-15%, 48 - 63 Hz
- 25 20 - 30V AC/DC, 48 - 63Hz

701160 / 8 - 0153 - 001 - 23

factory setting

Scope of delivery

- | |
|---|
| 1 JUMO safetyM TB/TW in the ordered version |
| 1 Operating Instructions 701160.0 |

Accessories

Sales No.

| | |
|--|-------------|
| Setup Programm, multilingual | 70/00514193 |
| PC interface with TTL/RS232 converter and adapter (socket) | 70/00350260 |
| PC interface with USB/TTL converter, adapter (socket) and adapter (pins) | 70/00456352 |
| External reset button RT | 70/97097865 |