

TRIME®-GW

(

,

!


TDR-



TRIME®-GW



IMKO 
MICROMODULTECHNIK GMBH

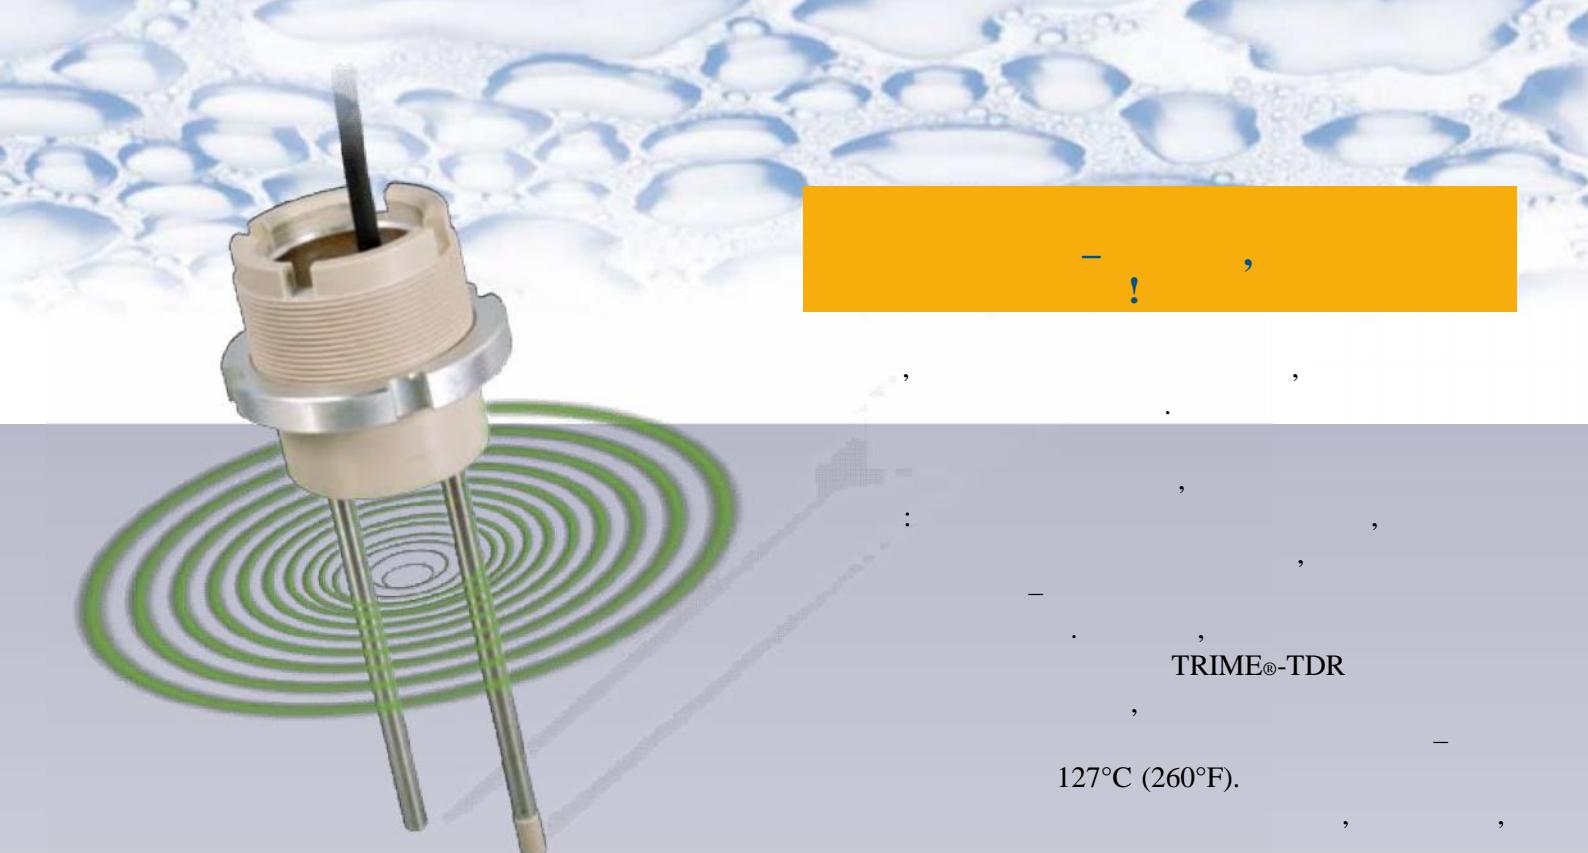

TRIME®-TDR

127°C (260°F).

TRIME®-GR

TRIME®-GW –

TRIME®-GW

TRIME®-GW

TRIME®-GW



TRIME®




TDR-

TRIME®-GW

TRIME®-GW.

2 GR

TRIME®-GW

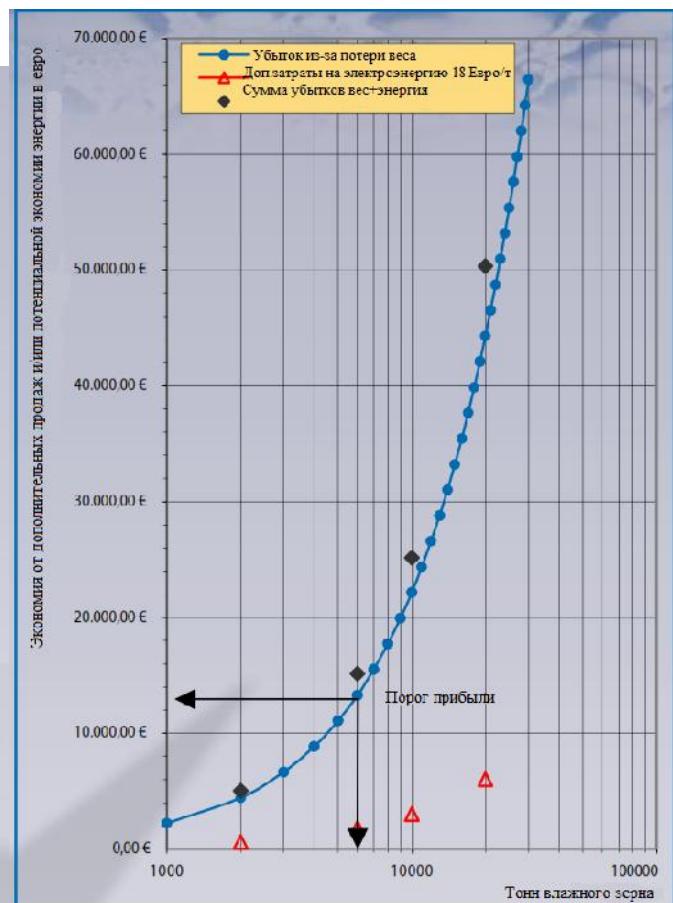

126

2%.

!

TRIME®-GW



TRIME®

TRIME®

	<p>GR 150 2 , , (PEEK).</p>
<p>GR 8 , : 150</p> 	<p>GR: Ø 70 , 75 ; : Ø , , WS2</p>
	<p>WS3 , , WS3 70%.</p>
<p>WS2 / WS3 : 150</p> 	<p>WS2: 70 x 105 x 26 , : Ø 10 , GS1 GS2 ,</p>
	<p>(, , , , .). , GS1 , , < 0,2 / ³. GS1: 280 x 70 x 40 GS2: 250 x 40 x 30</p>




DLG

(TDR-

) TRIME®, DLG (),
), DLG,

RIME®-GW


DLG:

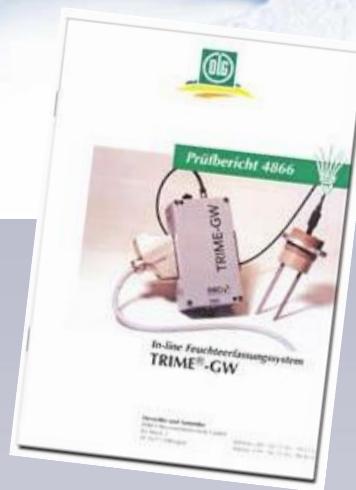

TRIME®-TDR

TRIME®-TDR

TRIME®
1-2
(),
TRIME®

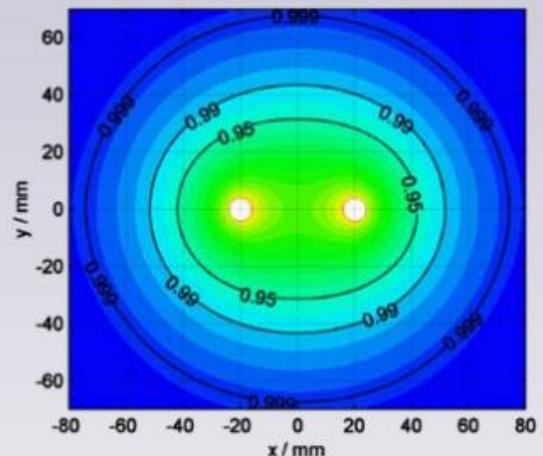

GR.
95% ()

TRIME®

TRIME®-TDR

Anheuser-Busch Breweries (),

- TRIME®-GW
- 180

Stela Laxhuber GmbH & Co. KG (),

- TRIME®-GW
- 280

FRA450

Proctor & Gamble ()



Nidera ()



&

AB Liros ()



Liros



!

:	9 ..36
	150 @24 DC 250 @12 DC
GR, WS2, GS1, GS2	0..45% . , .
WS3	0..70% . , .
	0..20%: 0,6%
	20..45%: 1%
	45..70%: 2%
:	+/- 0,3%
	-10°C..60°C
:	0..127°C; 150°C
	(20 20)
:	IMP232 MICRONET RS232/V24
:	0 4..20 = 0 .. 100% . (. . . :: 300)
:	2,5
:	. , IP65
:	(PEEK), IP68



,



1999,
DLG ()

DLG ()



, . . . : +38-044-494-33-55
-mail: kck@kck.ua, Web- : <http://www.kck.ua>