Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29

Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29 Email: sales@jumo.co.uk Internet: www.jumo.co.uk JUMO Process Control, Inc.

6733 Myers Road East Syracuse, NY 13057, USA Phone: +1 315 437 5866

Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com



Data Sheet 401015

Page 1/9

# **JUMO MAERA S25**

# Level probe

## **Applications**

#### Level and level measurements<sup>1</sup>

- In rainwater cisterns
- In gray water recycling
- · Heating oil and diesel oil tanks
- In AUS32 (known in Europe as "AdBlue®", "DEF" in North America, or "ARLA 32" in Brazil)

## **Brief description**

The JUMO MAERA S25 level probe is used for the continuous hydrostatic level measurement of liquids. Filling heights between 2.50 mWS and 10 mWS (water column) can be achieved in ventilated tanks

When the level probe is immersed into a liquid, a liquid column emerges above the probe. The liquid column increases as the probe is immersed deeper into the liquid and creates a hydrostatic pressure on the measuring system by the force of its weight. The measured pressure is transferred as a standard signal. The signal is linearly proportional to the rising liquid column.

Any variations in air pressure are automatically compensated for using a protective hose and the surrounding pressure is therefore taken into account.

Further information on our level probes from the JUMO MAERA series can be found in the brochure "Level probes – Hydrostatic level and level measurement" in the documentation.

#### Customer benefits

Economic

The standardized, constructive design and constant optimization of the production process result in an excellent price-performance ratio of the level probe.

· Process-reliable

The core of the level probe is a piezoresistive measuring cell, which features high overload resistance and is particularly safe, reliable, and temperature resistant. Each level probe is tested in a fully automated measuring and calibration facility to ensure consistently high product quality. A reverse-polarity protection mechanism protects the measuring instrument against damage, ensuring maximum safety during startup.



Type 401015 with process connection 707

## **Special features**

- Level probe for continual level measurement in liquids
- Measuring ranges: 250 mbar to 1 bar (2.5 to 10 mWS)
- Medium temperature 0 to 50 °C
- Piezoresistive silicon sensor
- Accuracy: 0.3% MSP<sup>2</sup> (linearity)
- Sensor technology proven thousands of times over
- · Reverse-polarity protection mechanism
- Suitable for indoor installation

These recommendations are based on many years of experience; however, in individual cases they may not be fully applicable. We would be happy to provide further information, including regarding additional applications.

<sup>&</sup>lt;sup>2</sup> MSP = measuring span

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

36035 Fulda, Germany +49 661 6003-0 Postal address: Phone: Fax: +49 661 6003-607 Email: mail@jumo.net www.jumo.net Internet:

JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 +44 1279 62 50 29 Email: sales@jumo.co.uk

Internet: www.jumo.co.uk

**JUMO Process Control, Inc.** 6733 Myers Road East Syracuse, NY 13057, USA Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net

Internet: www.jumousa.com



Data Sheet 401015

# **Technical data**

#### **General information**

| Reference conditions    | DIN 16086 and DIN EN 60770                                     |
|-------------------------|--|
| Measuring principle     | Piezoresistive sensor with stainless steel separating membrane |
| Pressure transfer means | Synthetic oil  |
| Admissible load changes | > 10 million, 0 to 100 % measuring range                       |
| Mounting position       | Vertical/hanging from the cable                                |

#### Output

| Analog output               |   |
|-----------------------------|---|
| Current                     |   |
| Output 405                  | 4 to 20 mA, two-wire  |
| Voltage                     |   |
| Output 412                  | DC 0.5 to 4.5 V, three-wire, ratiometric 10 to 90 % of the voltage supply |
| Output 415                  | DC 0 to 10 V, three-wire  |
| Output 418                  | DC 1 to 5 V, three-wire   |
| Output 420                  | DC 1 to 6 V, three-wire   |
| Step response               |   |
| T <sub>90</sub>             | ≤ 10 ms   |
| Burden                      |   |
| Current                     |   |
| 4 to 20 mA, two-wire        | $R_{L} \le (U_{B}-10 \text{ V}) \div 0.02 \text{ A} (\Omega)$             |
| Voltage                     |   |
| DC 0.5 to 4.5 V, three-wire | $R_L \ge 20 \text{ k}\Omega$  |
| DC 0 to 10 V, three-wire    | $R_L \ge 10 \text{ k}\Omega$  |
| DC 1 to 5 V, three-wire     | $R_L \ge 10 \text{ k}\Omega$  |
| DC 1 to 6 V, three-wire     | $R_L \ge 10 \text{ k}\Omega$  |

#### **Mechanical features**

Ensure the medium durability of the material!

| Process connection     |                        |
|------------------------|------------------------|
| Material               |                        |
| Process connection 567 | Stainless steel 316 L  |
| Process connection 707 | Stainless steel 316 Ti |
| Measuring membranes    |                        |
| Material               | Stainless steel 316 L  |
| Case                   |                        |
| Material               | Stainless steel 304    |
| Protective cap         |                        |
| Material               | Hard PVC               |
| Weight                 | 90 g (without cable)   |
| Diameter               | 25 mm                  |

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

#### JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29 Email: sales@jumo.co.uk

Internet: www.jumo.co.uk

### JUMO Process Control, Inc.

6733 Myers Road East Syracuse, NY 13057, USA Phone: +1 315 437 5866

Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com



Data Sheet 401015

Page 3/9

#### **Environmental conditions**

| Admissible temperatures            |   |
|------------------------------------|---|
| Medium                             | 0 to 50 °C The device must <b>not</b> freeze in the medium! |
|                                    | A restriction may be required depending on the medium.      |
| Storage                            | -20 to +80 °C, dry  |
| Electromagnetic compatibility      |   |
| Interference emission <sup>a</sup> | Class B   |
| Interference immunity <sup>b</sup> | Industrial requirements                                     |
| Protection type <sup>c</sup>       | IP68, submersible to 20 m                                   |

According to EN 61326-1

#### Measuring range and accuracy

| Measuring range                 | Linearitya | Accuracy | , ,                     | Long-term              | Overload   | Burst    |
|---------------------------------|------------|----------|-------------------------|------------------------|------------|----------|
|                                 |            | 20 °Cc   | 0 to 50 °C <sup>d</sup> | stability <sup>b</sup> | capability | pressure |
| bar                             | % MSP      | % MSP    | % MSP                   | % MSP                  | bar        | bar      |
|                                 |            |          |                         | per year               |            |          |
| 0 to 0.25 bar relative pressure | 0.3        | 0.5      | 1                       | ≤ 0.3                  | 0.75       | 1        |
| 0 to 0.4 bar relative pressure  | 0.3        | 0.5      | 1                       |                        | 1.2        | 1.6      |
| 0 to 0.6 bar relative pressure  | 0.3        | 0.5      | 1                       |                        | 1.8        | 2.4      |
| 0 to 1 bar relative pressure    | 0.3        | 0.5      | 1                       |                        | 3          | 4        |

Linearity according to limit point setting

#### **Auxiliary energy**

| Voltage supply U <sub>B</sub> <sup>a</sup> |  |
|--|--|
| 4 to 20 mA, two-wire (output 405)          | DC 10 to 30 V, nominal voltage DC 24 V   |
| DC 0.5 to 4.5 V, three-wire (output 412)   | DC 5 V                                   |
| DC 0 to 10 V, three-wire (output 415)      | DC 11.5 to 30 V, nominal voltage DC 24 V |
| DC 1 to 5 V, three-wire (output 418)       | DC 10 to 30 V, nominal voltage DC 24 V   |
| DC 1 to 6 V, three-wire (output 420)       | DC 10 to 30 V, nominal voltage DC 24 V   |

The voltage peaks must not exceed or fall below the specified voltage supply values!

| Reverse voltage protection | Yes (except output 412)  |
|----------------------------|--|
| Max. current consumption   | 25 mA  |
| Electrical circuit         | SELV   |
| Requirements               | The device must be equipped with an electrical circuit that meets the requirements of EN 61010-1 with regard to "Limited-energy circuits". |

b According to EN 61326-2-3

According to EN 60529

b Reference conditions EN 61298-1

<sup>&</sup>lt;sup>c</sup> Includes: linearity, hysteresis, repeatability, deviation from measuring range start (offset), and measuring range end

d Includes: linearity, hysteresis, repeatability, deviation from measuring range start (offset) and measuring range end, thermal influences on measuring range start (offset), and measuring span

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

Postal address: 36035 Fulda, Germany Phone: +49 661 6003-0 Fax: +49 661 6003-607 Email: mail@jumo.net Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29

Email: sales@jumo.co.uk Internet: www.jumo.co.uk

JUMO Process Control, Inc.

6733 Myers Road East Syracuse, NY 13057, USA

Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com



Data Sheet 401015

#### **Electrical connection**

For this construction, a stranded PVC cable is encased in an application-oriented protective hose made from either PE or PA.

To prevent moisture penetrating into the protective hose, in this case the pressure equalization hose, the delivery includes a hose end piece with the fitting materials.

| Protective hose                |  |
|--------------------------------|--|
| Material                       | PE, PA <sup>a</sup>  |
| Color                          | Natural  |
| Outer diameter                 | 8 mm   |
| Bending radius                 | Approx. 120 mm It is vital to take into account that if the protective hose is kinked or pinched, this will prevent ambient pressure compensation. |
| Admissible medium temperatures | 0 to 50 °C (depending on the medium and the level probe)   |
| Yield stress                   |  |
| PE protective hose             | 10 M Pa  |
| PA protective hose             | 22 M Pa  |

Depending on the version ordered

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

#### JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway

Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29 Email: sales@jumo.co.uk Internet: www.jumo.co.uk

#### JUMO Process Control, Inc.

6733 Myers Road

East Syracuse, NY 13057, USA Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com





Data Sheet 401015

Page 5/9


# **Dimensions**

#### **Process connection**

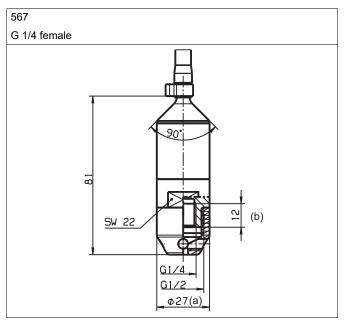

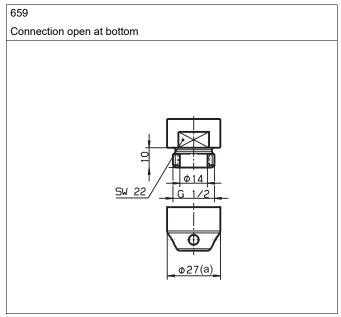

- (a) The protective cap has three bore holes (Ø 3) and protects the case against contact corrosion and the sensitive separating membrane
- (b) Maximum screw-in depth

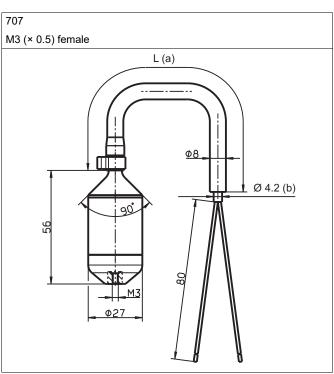

- (a) Cable length according to customer preference
- (b) Ø 4.6 for three-wire output

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33

Fax: +44 1279 62 50 29 Email: sales@jumo.co.uk Internet: www.jumo.co.uk JUMO Process Control, Inc.

6733 Myers Road

East Syracuse, NY 13057, USA Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com





Data Sheet 401015

Page 6/9

# **Accessory dimensions**

#### Terminal head for pressure compensation

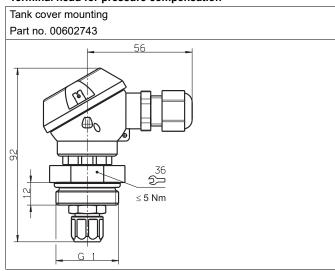

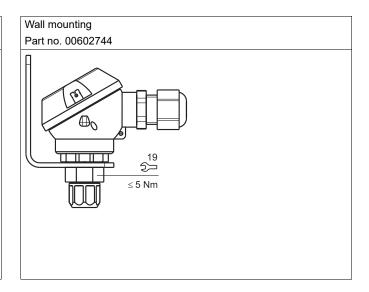

# **Connection diagram**

The connection diagram in the data sheet provides preliminary information about the connection options. For the electrical connection only use the installation instructions or the operating manual. The knowledge and the correct technical execution of the safety information/instructions contained in these documents are mandatory for installation, electrical connection, startup, and for safety during operation.

| Connection  |   | Terminal assignment     |
|---|---|-------------------------|
|   |   |                         |
|   |   | Cable <sup>a</sup>      |
| 4 to 20 mA, two-wire (output 405)   |   |                         |
| Voltage supply DC 10 to 30 V,<br>Rated voltage supply DC 24 V             | U <sub>B/S</sub> + <sup>b</sup><br>0 V/S-   | White<br>Brown          |
| DC 0.5 to 4.5 V ratiometric (output 412)                                  | <u>'</u>                                    | ,                       |
| Voltage supply DC 5 V,<br>Rated voltage supply DC 5 V                     | U <sub>B</sub> <sup>b</sup><br>0 V/S-<br>S+ | White<br>Brown<br>Green |
| DC 0 to 10 V, three-wire (output 415)                                     | l .   |                         |
| Voltage supply DC 11.5 to 30 V,<br>Rated voltage supply DC 24 V           | U <sub>B</sub> <sup>b</sup><br>0 V/S-<br>S+ | White<br>Brown<br>Green |
| DC 1 to 5 V, three-wire (output 418) DC 1 to 6 V, three-wire (output 420) | <u>'</u>                                    |                         |
| Voltage supply DC 10 to 30 V,<br>Rated voltage supply DC 24 V             | U <sub>B</sub> <sup>b</sup><br>0 V/S-<br>S+ | White<br>Brown<br>Green |

For cable specifications, see installation instructions B 401015.4, chapter 6 "Installation and mounting".

b The voltage peaks must not exceed or fall below the specified voltage supply values!

Delivery address: Mackenrodtstraße 14

36039 Fulda, Germany 36035 Fulda, Germany +49 661 6003-0 Postal address: Phone: +49 661 6003-607 Fax: Email: mail@jumo.net Internet: www.jumo.net

#### JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway

Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 Fax: +44 1279 62 50 29 Email: sales@jumo.co.uk Internet: www.jumo.co.uk

# **JUMO Process Control, Inc.** 6733 Myers Road East Syracuse, NY 13057, USA


Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com




Data Sheet 401015

#### **Connection example**

Current output

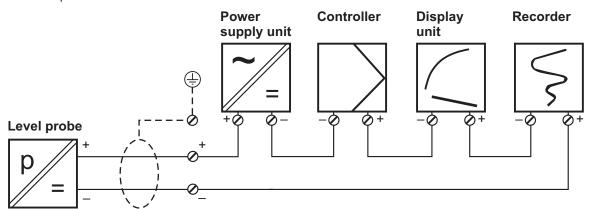

Voltage output

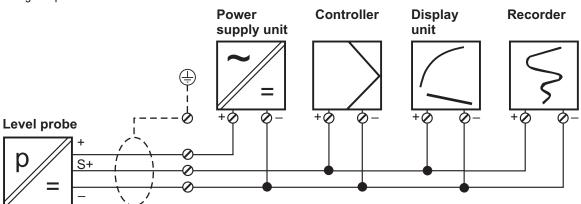

Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

36035 Fulda, Germany +49 661 6003-0 Postal address: Phone: Fax: +49 661 6003-607 Email: mail@jumo.net Internet: www.jumo.net

#### JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33 +44 1279 62 50 29 Email: sales@jumo.co.uk

Internet: www.jumo.co.uk

Internet: www.jumousa.com


**JUMO Process Control, Inc.** 6733 Myers Road East Syracuse, NY 13057, USA Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net

Data Sheet 401015

# **Order details**

|        | (1)  | Basic type                                 |
|--------|------|--|
| 401015 |      | JUMO MAERA S25 – Level probe               |
|        | (2)  | Basic type extension                       |
| 000    |      | None                                       |
| 999    |      | Special version                            |
|        | (3)  | Input                                      |
| 451    |      | 0 to 250 mbar relative pressure            |
| 452    |      | 0 to 400 mbar relative pressure            |
| 453    |      | 0 to 600 mbar relative pressure            |
| 454    |      | 0 to 1 bar relative pressure               |
|        | (4)  | Output                                     |
| 405    |      | 4 to 20 mA, two-wire                       |
| 412    |      | DC 0.5 to 4.5 V, three-wire                |
| 415    |      | DC 0 to 10 V, three-wire                   |
| 418    |      | DC 1 to 5 V, three-wire                    |
| 420    |      | DC 1 to 6 V, three-wire                    |
|        | (5)  | Process connection                         |
| 567    |      | G 1/4 inside                               |
| 659    |      | Connection open at the bottom              |
| 707    |      | M3 (× 0.5) inside                          |
|        | (6)  | Process connection material                |
| 20     |      | CrNi (stainless steel)                     |
|        | (7)  | Electrical connection type                 |
| 11     |      | Attached cable                             |
|        | (8)  | Protective hose                            |
| 1      |      | PE protective hose                         |
| 2      |      | PA protective hose                         |
|        | (9)  | Cable length of the connecting cable       |
| 005    |      | 5 m  |
| 010    |      | 10 m                                       |
| 025    |      | 25 m                                       |
|        | (10) | Extra codes                                |
| 000    |      | None                                       |
| 691    |      | Improved moisture and vibration protection |





Delivery address: Mackenrodtstraße 14 36039 Fulda, Germany

36035 Fulda, Germany +49 661 6003-0 Postal address: Phone: Fax: +49 661 6003-607 Email: mail@jumo.net www.jumo.net Internet:

JUMO Instrument Co. Ltd.

JUMO House Temple Bank, Riverway Harlow, Essex CM 20 2DY, UK Phone: +44 1279 63 55 33

+44 1279 62 50 29 Email: sales@jumo.co.uk Internet: www.jumo.co.uk

**JUMO Process Control, Inc.** 6733 Myers Road East Syracuse, NY 13057, USA

Phone: +1 315 437 5866 Fax: +1 315 437 5860 Email: info.us@jumo.net Internet: www.jumousa.com



Data Sheet 401015

# **Accessories**

| ltem  | Description   | Part no. |
|---|---|----------|
| Terminal head for pressure compensation Tank cover mounting | The terminal head is only suitable for application in the level probe variant JUMO MAERA S25 (type 401015).   | 00602743 |
|   | It is used to mount the level probes cost-effectively and in the best possible way. Protection type IP 67 is achieved.  |          |
|   | By using it locally with the tank mounting or wall mounting versions, a rapid pressure compensation can be achieved and the length of the special cable can be minimized. The costs are thereby reduced as an electric standard cable can be used as the outgoing cable from the terminal head. |          |
| Ť   | Furthermore, the direction (for example to the control cabinet) can be individually specified.  |          |
| Wall mounting   |   | 00602744 |
|   |   |          |

# Scope of delivery

| Item           | Description   |  |  |  |
|----------------|---|--|--|--|
| Hose end piece | With this device, a standard cable is encased in a protective hose suitable for the application. The hose end piece prevents the hose, which is used as a pressure compensation hose, from being cut off or bent, for example when being routed through a wall. The hose end piece may be used for example in routing through walls in masonry, clamp or cutting ring fittings in a tank, or cable glands in a control cabinet. |  |  |  |
|                | The hose end piece is supplied with the device.   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |
|                |   |  |  |  |